



**GSXR600/750**  
**Fender Eliminator Kit**  
**P/N: 670-5430**

Kit Contents

Part Number	Description	Quantity
99-FE-670-5430	Fender Brackets	1
99-HB-6x16	6x16 Bolt	4
99-HB-6x12	6x12 Bolt	6
99-Wash6x15	6X15mm Washer	8
99-Wash6x12	6X12mm Washer	6
99-LN-6	6MM Lock Nuts	6

- 1 - Remove Rider and Rear Seats.
  - 2 - Remove right side rear body work by removing (4) push clips and (1) Phillips screw.
  - 3 - Disconnect license plate light wire. (Fig 1)
  - 4 - Remove factory fender by removing (4) 6MM hex flange bolts from under tail.
  - 5 – Mount the “DMP Fender Eliminator Kit” by loosely installing the (4) supplied 6mm bolts and 6X15mm washers.  
(Do not tighten at this time)
  - 6 - Mount plate bracket using (2) supplied 6mm button head bolts, (2) 6X12mm washers and locknuts. Center plate and brackets to tail section and tighten the (2) 6mm plate brackets bolts and (4) 6mm mounting bracket bolts.
  - 7 - Connect License Plate light (not included) wire and check for proper function.
  - 8 - Reinstall body work.
  - 9- Remaining hardware to be used for mounting license plate.
- Use blue thread locker to secure bolts. Refer to owner’s manual for proper torques.

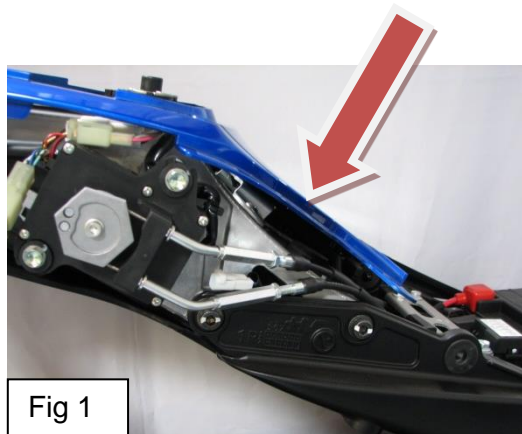


Fig 1