



**Yamaha R6
Fender Eliminator Kit
P/N: 670-6330**

Kit Contents

Part Number	Description	Quantity	Part Number	Description	Quantity
99-FE-670-6330	Fender Brackets	1	Locknuts	6mm Locknut	8
99-HB-6x25	6x25 Bolt	4	99-Wash6x15	6x15mm Washer	8
99-HB-6x12	6x12 Bolt	4	99-Wash6x12	6x12mm Washer	2

- 1 - Remove Rider Seat and Rear Seat.
- 2 - Remove rear upper tail bodywork.
- 3 - Remove rear seat latch, by removing cotter pin and (2) 6mm button heads bolts. (Fig. 1 #1)
- 4 - Remove aluminum seat support; by removing (8) 6mm button head bolts. (Fig. 1 #2)
- 5 - Disconnect marker light wires and tail light wires.
- 6 - Lift up trunk tray. (Fig. 2)
- 7 - Remove (4) fender bolts. (Fig. 3)
- 8 - Carefully slider marker lights through hole as you pull down on fender.
- 9 - Loosely install right and left DMP Fender Eliminator Brackets using supplied (4) 6 x 25mm bolts washers and locknuts.
- 10 - Loosely install license plate bracket using supplied (2) 6 x 12mm button head bolts, washers and locknut.
- 11 - With license plate bracket centered, tighten all nuts and bolts.
- 12 - Install marker lights and license plate.
- 13 - Reconnect marker light wires, brake light wires and plate light wires (not included).
- 14 - Check light for proper function.
- 15 - Mount rear upper tail bodywork.
- 16 - Mount seats.
- 17 - Remaining hardware to be used for mounting license plate.

Note: To complete your installation we recommend using DMP Marker Lights and DMP OEM Type Wire Harness, which are available from your local DMP dealer or www.moto911.com.

Use blue thread locker to secure bolts. Refer to owner's manual for proper torques.

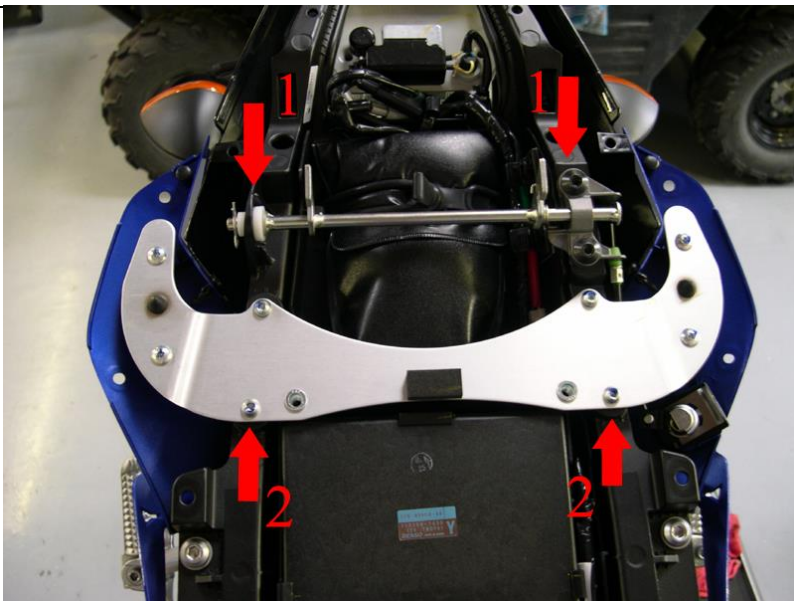


Fig 1

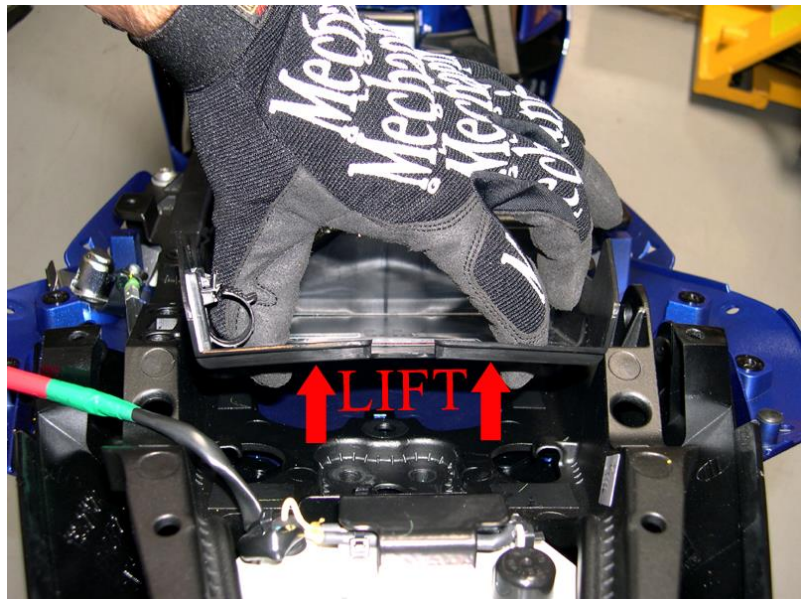


Fig 2

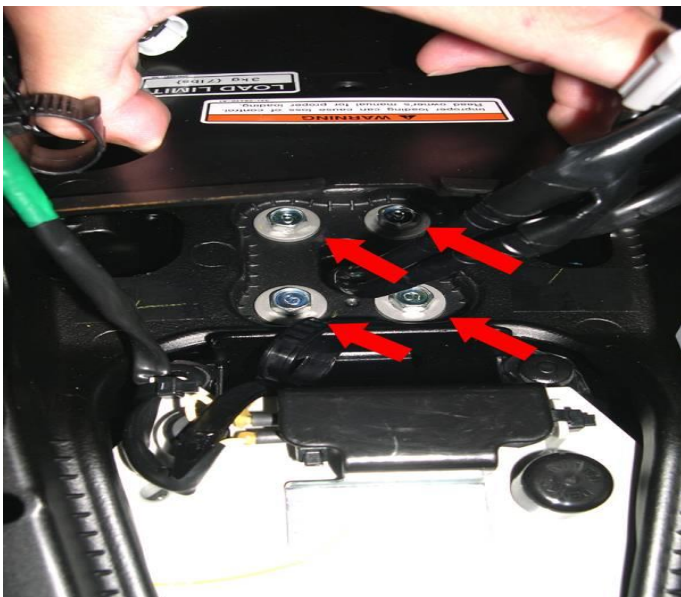


Fig 3