



Kit Contents

Part Number	Description	Quantity	Part Number	Description	Quantity
99-FE-670-6370	Fender Bracket	1	99-Wash6x12	6x12mm Washer	4
99-HB-6x20	6x20 Bolt	4	99-HB-6x12	6x12 Bolt	4
99-Wash6x15	6X15mm Washer	12			
99-LN-6	6MM Lock Nuts	8			

- 1 Remove Passenger seat release and remove tool kit. (Fig 1)
- 2 Remove passenger hand rail by removing (4) 6mm bolts. (Fig 2)
- 3 Remove rider seat by removing (2) 6mm bolts in back of seat. (Fig 3)
- 4 Remove right rear body panel to expose electrical connections. (Fig 4)
- 5 Disconnect OEM electrical connections that are associated to the rear OEM fender. (Fig 4)
- 6 Remove (4) 6mm bolts that support the stock OEM rear fender. (Fig 1)
- 7 Remove wire loom cover, to enable you to remove stock fender, by disconnecting (1) body clip located where wire loom feeds into tail section.
- 8 Mount plate bracket using (4) supplied 6mm socket cap bolts, (8) 6X15mm washers and (4) locknuts. (Fig 5)
- 9 Connect license plate light and marker lights (not included). Check for proper function.
- 10- Reassemble.
- 11 Remaining hardware to be used for mounting license plate.

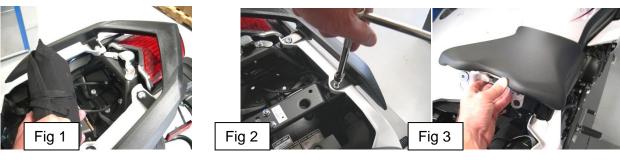

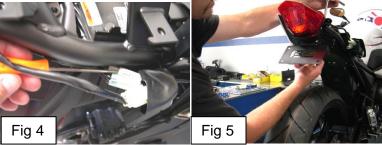

Moto911 Inc. - 1062 Calle Negocio, Ste. J, 3 San Clemente, Ca. 92673 - (949)453-9111