



P/N: 670-4515
 Fender Eliminator Kit SLR
 MADE IN THE USA!

Kit Contents


Part Number	Description	Quantity	BH 99-HB-6x25	6x25 BH Bolt	2
99-FE-670-4515	Fender Bracket License Plate	1	6-LN-6	6x1 Lock Nut	6
99-Wash6x15	6x15mm Washer	10			
99-HB-6x20	6x20 Bolt	2			
99-Wash6x12	6x12mm	2			
99-HB-6x12	6x12 BH Bolt	2			

Note: Make sure bike is turned off during installation. It is highly recommended that the DMP fender Eliminator is installed by a certified technician. DMP is not responsible for any part of your motorcycle for any reason. If in any doubt please call us during installation.

1. Remove rider and passenger seat.
2. Remove left and right tail section body cowls.



3. Disconnect OEM turn signals and plate light. Loosen fasteners that hold the OEM rear fender and remove.

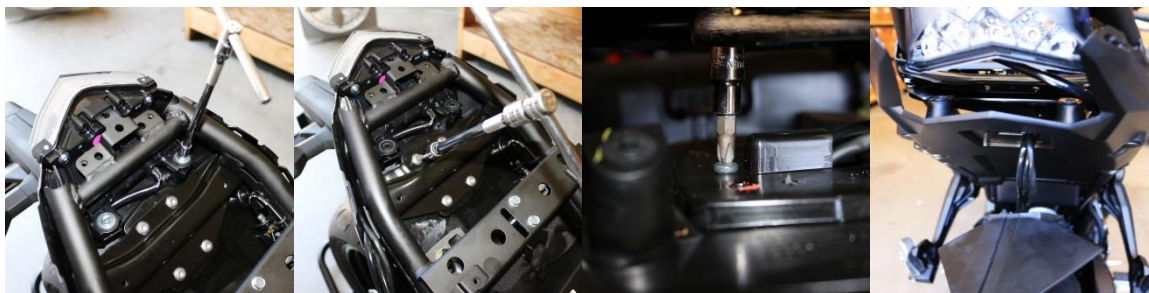


4. Disassemble OEM rear fender to reuse components needed for your DMP fender kit SLR. (Image shown below is a rapid prototype and is for illustration purposes only.)



5. Install existing OEM components removed from stock fender to the new DMP fender kit SLR.



6. Mount DMP SLR Fender Eliminator Kit using 6 X 20 (2) & 6 X 25 (2) button heads, 6 X 15 (8) washers and 6 X 1 (4) Locknuts while pulling OEM wire loom (turn signals and plate light connectors) to the right side of sub-frame, reconnect and test function.

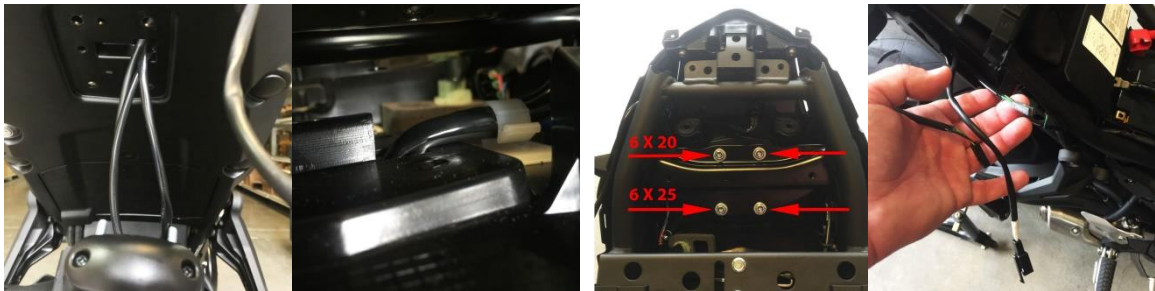

7. Reinstall base fender screws and reinstall side tail section body cowl and seats.

